



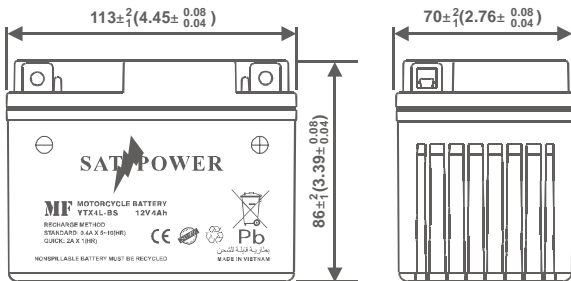


Dimensions

mm(inch)



(V) FOR 12V BATTERY Discharge Time VS. Discharge Current (25 °C)

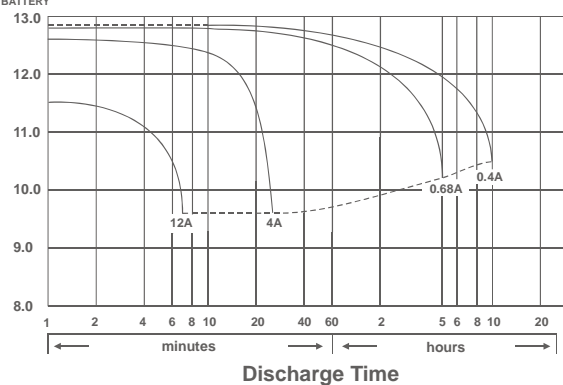

YTX4L-BS

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

10 hour rate	(0.4A	to	10.50V)	4Ah
5 hour rate	(0.68A	to	10.20V)	3.4Ah
1 C	(4A	to	9.60V)	1.8Ah
3 C	(12A	to	9.60V)	1.4Ah

Weight Approx. 1.48kg(3.26Lbs.)

Internal Resistance (at 1KHz) Approx. 16 mΩ

Cold Cranking Amperes (-17.8 °C) 50A

High rate discharge characteristics (-10 °C)

Discharge current (A)	30A
Duration (min)	1.8min
5 second voltage (V)	9.9V

Operating Temperature Range


Charge	-15 (5 °C)	to	40 (104 °F)
Discharge	-15 (5 °C)	to	50 (122 °F)
Storage	-15 (5 °C)	to	40 (104 °F)

Charge Retention (shelf life) at 20 °C (68 °F)

1 month	92%
3 month	90%
6 month	80%

Case Material PP

Terminal Shape

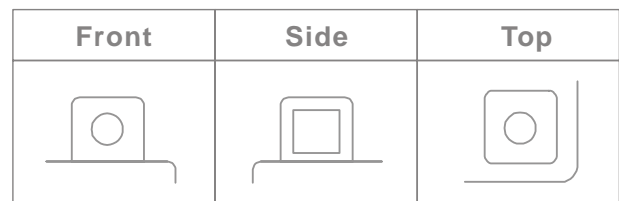

221215-1A-SAU0003