




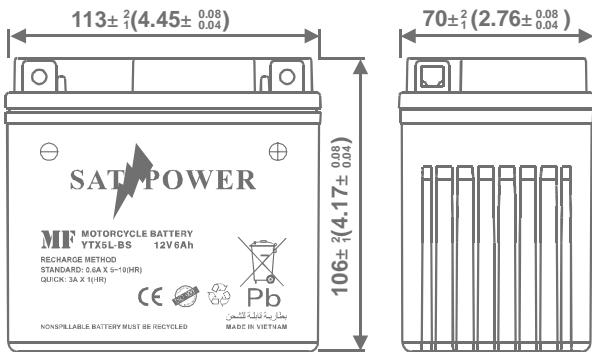

Dimensions mm(inch)



(V) FOR 12V BATTERY **Discharge Time VS. Discharge Current (25 °C)**

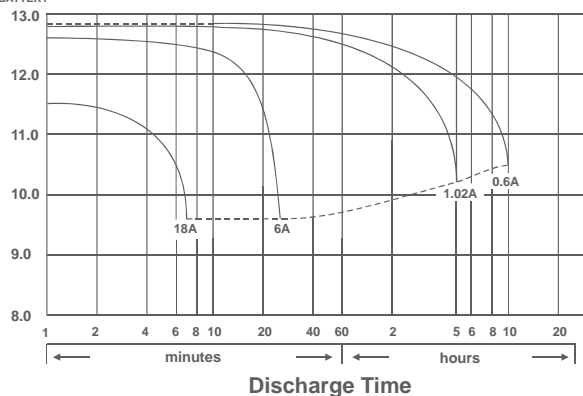

YTX5L-BS

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

10 hour rate	(0.6A	to	10.50V)	6Ah
5 hour rate	(1.02A	to	10.20V)	5.1Ah
1 C	(6A	to	9.60V)	2.7Ah
3 C	(18A	to	9.60V)	2.1Ah

Weight Approx. 2.07kg(4.55Lbs.)

Internal Resistance (at 1KHz) Approx. 14 mΩ

Cold Cranking Amperes (-17.8 °C) 90A

High rate discharge characteristics (-10 °C)

Discharge current (A)	40A
Duration (min)	0.9min
5 second voltage (V)	8.6V

Operating Temperature Range


Charge	-15 (5 °C)	to	40 (104 °C)
Discharge	-15 (5 °C)	to	50 (122 °C)
Storage	-15 (5 °C)	to	40 (104 °C)

Charge Retention (shelf life) at 20 °C (68 °F)

1 month	92%
3 month	90%
6 month	80%

Case Material PP

Terminal Shape

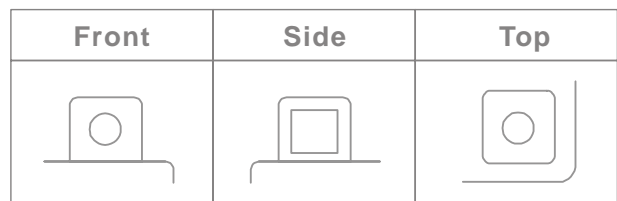

221215-1A-SAU0003