



YTX9-BS

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

10 hour rate	(0.8A	to	10.50V)	8Ah
5 hour rate	(1.36A	to	10.20V)	6.8Ah
1 C	(8A	to	9.60V)	3.6Ah
3 C	(24A	to	9.60V)	2.8Ah

Weight Approx. 3.4kg(7.48Lbs.)

Internal Resistance (at 1KHz) Approx. 9.1 mΩ

Cold Cranking Amperes (-17.8) 120A

High rate discharge characteristics (-10)

Discharge current (A)	70A
Duration (min)	1.9min
5 second voltage (V)	9.7V

Operating Temperature Range


Charge	-15 (5)	to	40 (104)
Discharge	-15 (5)	to	50 (122)
Storage	-15 (5)	to	40 (104)

Charge Retention (shelf life) at 20 (68)

1 month	92%
3 month	90%
6 month	80%


Case Material ABS

Terminal Shape

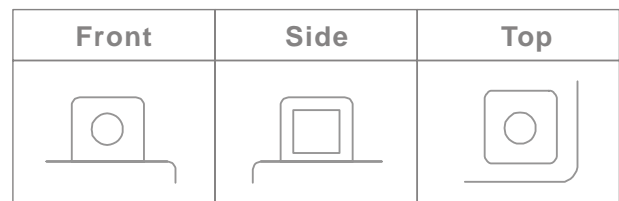


Dimensions

mm(inch)

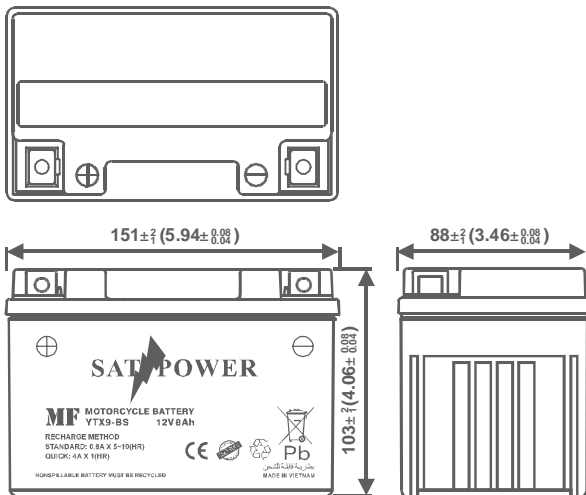

(v) FOR 12V BATTERY Discharge Time VS. Discharge Current (25)

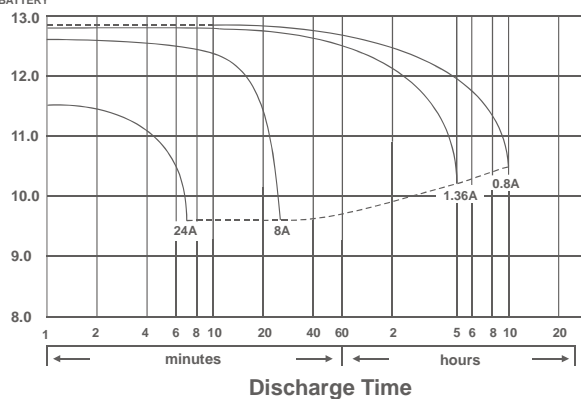

221215-1A-SAU0003