


# LP SERIES-GENERAL PURPOSE

## LP12-120 (12V120Ah)

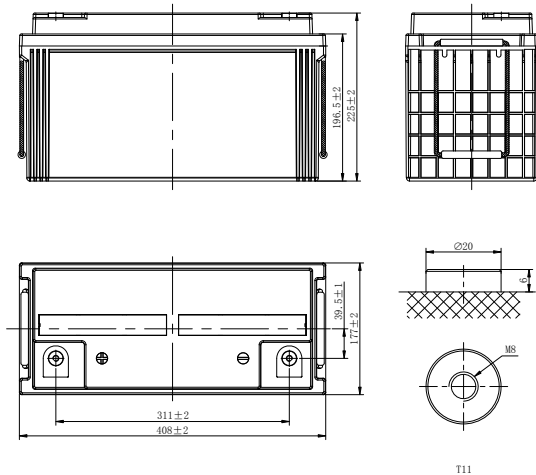

### CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25°C)	C <sub>10</sub> , 1.80V/cell	120Ah
Dimension	Length	408mm (16.1inches)
	Width	177mm (6.97inches)
	Container Height	225mm (8.86inches)
	Total Height	225mm (8.86inches)
Approx Weight	35.0kg (77.2lbs)	
Terminal	T11(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	2400A	
Internal Resistance (25°C)	Approx 4 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max. Charging Current (25°C)	0.3C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.25-2.30V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
	40°C (104°F)	103%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	≤3% per month at 25°C (77°F). LP series batteries may be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Self Discharge		

### DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	234.7	166.9	150.8	118.6	106.1	77.5	65.7	47.6	40.0	29.4	23.0	20.0	17.6	13.6	11.2	5.96
1.80V/cell	266.9	189.4	170.9	134.1	115.5	82.1	68.1	49.2	41.3	31.9	24.6	21.0	18.9	14.3	12.0	6.17
1.75V/cell	289.9	205.4	185.1	144.8	117.8	85.1	71.4	51.8	43.5	32.5	25.1	21.4	19.1	14.3	12.1	6.24
1.70V/cell	309.9	219.0	196.5	153.5	120.2	86.8	72.8	52.8	44.4	33.1	25.5	21.8	19.2	14.6	12.2	6.30
1.67V/cell	320.8	226.0	202.3	157.7	122.0	88.1	73.9	53.6	45.0	33.4	25.9	22.2	19.3	14.8	12.3	6.38
1.60V/cell	332.1	233.7	208.6	161.8	123.7	89.3	75.0	54.3	45.7	33.7	26.2	22.5	19.4	14.9	12.4	6.45
Constant Power Discharge (Watts/cell) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	438.3	313.9	285.6	225.6	202.7	149.0	127.1	92.4	77.9	57.4	45.2	39.4	34.8	26.9	22.3	11.9
1.80V/cell	490.3	351.2	319.5	252.4	218.9	156.8	130.9	95.0	80.0	62.0	48.1	41.2	37.2	28.2	23.4	12.3
1.75V/cell	523.3	374.8	341.0	269.4	221.7	161.5	136.7	99.4	83.9	63.0	48.8	41.8	37.4	28.3	23.6	12.4
1.70V/cell	550.1	394.0	358.5	283.2	224.2	163.6	138.7	101.0	85.2	64.0	49.5	42.4	37.5	28.7	23.8	12.5
1.67V/cell	559.1	400.4	364.3	287.8	225.8	165.1	140.0	101.9	86.1	64.3	50.1	43.1	37.6	29.0	24.0	12.6
1.60V/cell	566.9	406.0	369.4	291.8	226.8	165.9	141.0	102.7	86.8	64.6	50.4	43.5	37.7	29.3	24.3	12.8

# LP SERIES-GENERAL PURPOSE

## LP12-120 (12V120Ah)



### APPLICATIONS

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system


### GENERAL FEATURES

- 10 years design life (25°C)
- Lead calcium alloy, sealed design, no watering required
- Puncture resistant micro-porous glass mat separators extend life
- Unique technology optimizes power capacity, cell consistency, and long-term reliability
- Designed for a wide range of applications


### STANDARDS

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Approved
- Manufactured in Leoch@IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


#### Discharge Characteristics

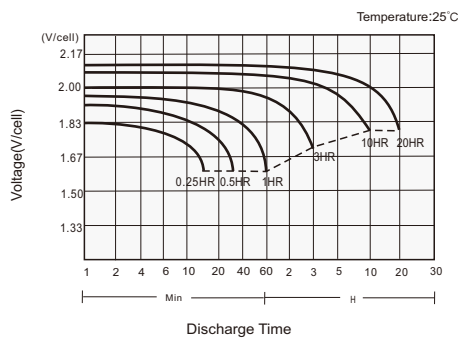

#### Charging Characteristics

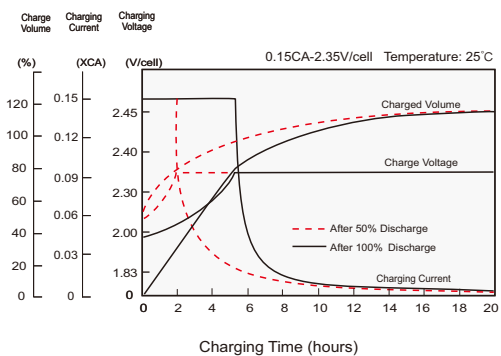

#### Effects of Temperature on Capacity

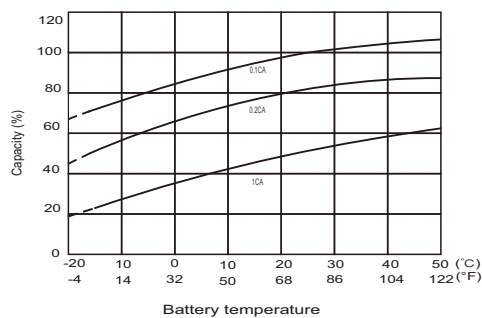

#### Self Discharge Characteristics

